

Linear · FDX SERIES Infrared 850 nm

lumher



24 V
DC

MASTER
SLAVE

CASCADABLE

90 mm
INCREMENTAL

CABLE
M12A

MACHINE VISION

CONTINUOUS 1x
STROBE 2x

INTEGRATED
CONTROLLER

IP40
IP65

36
MONTHS

MADE IN SPAIN

Technical specifications

Power supply voltage	24 Vdc $\pm$ 5%	
Trigger input	24 Vdc PNP / NPN	
Max. on time	Continuous = unlimited	Strobe = 10 ms
Max. working cycle	Continuous = 1	Strobe = 1/6
Max. consumption Trigger input	1,5 mA	
Max. number of cascadable modules	Power = 48	Strobe = 24
Wavelength	Infrared	850 nm
Beam angle	Semidiffuse Ultradiffuse	60° 110°
Electrical protections	Transient overvoltages Polarity reversal Current sabilizer	YES YES YES
IP Rating	IP40 o IP65	
Protection type	Class III	
Operating temperature	-10°C to +40°C	
Storage temperature	0°C to +60 °C	
Max. relative humidity	80% (without condensation)	
Body material	Anodized aluminum	
Side cover material	Anodized aluminum	
Diffuser material	Polycarbonate	
Connection types	M12A, 2m cable, M12A connector with cable	
Standards	RoHs, CE	


(1) The number representing the length of the luminaire is the number of modules it has.

Connection


M12A input - Cable	Continuous	Master Continuous - Strobe	Slave Continuous - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Trigger NPN	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Trigger PNP	Signal IN - a

M12A output	Continuous	Master Continuous - Strobe	Slave Continuous - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Not connected	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Signal OUT - a	Signal OUT - a

M12A Male

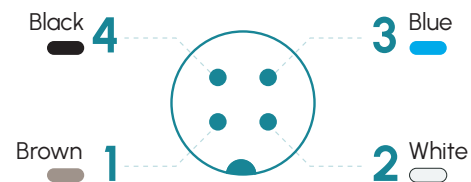

M12A Female

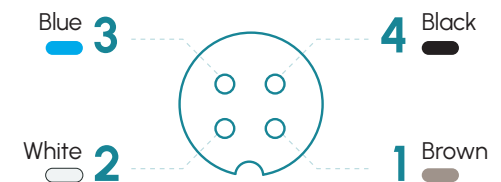

Fixings

F00G2, F00G4, F00R1, M6D16

FDX · 850 nm




lumher

Measures


IP40

M12A axial version

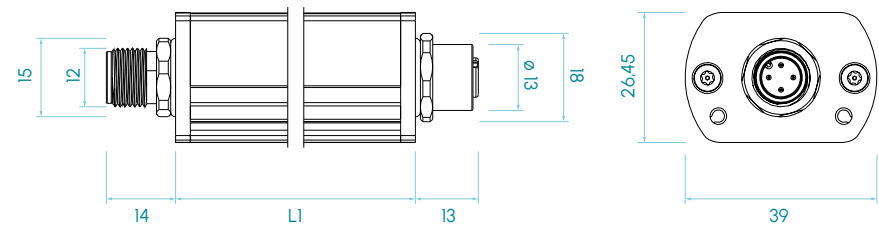

IP65


M12A axial version

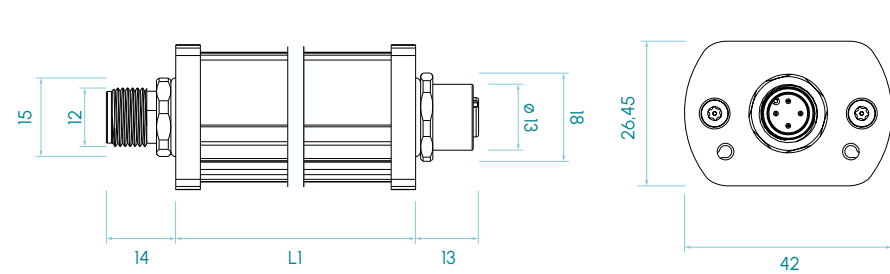

Measures in mm

FDX · 850 nm

Selection guide

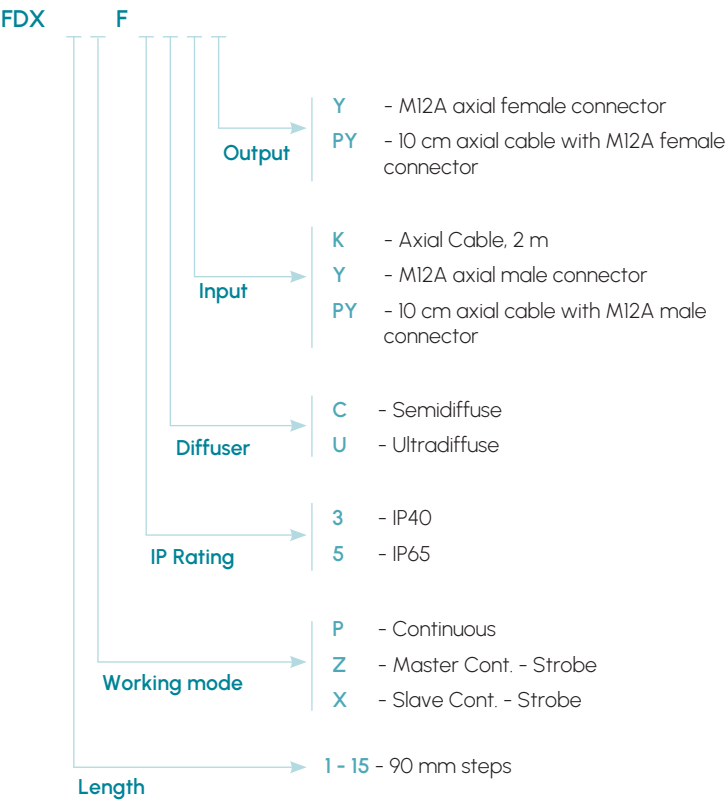

Model FDX · Infrared 850 nm



FDX

850nm
INFRARED

SEMIDIFFUSE
60°

ULTRADIFFUSE
110°

PHOTOBIOLOGICAL
RISK
RG1 - LOW

60.000h
LIFESPAN

Table of characteristics

	Length	Weight	Radiated power ⁽²⁾		Power consumed	
	L1		(W)		(W)	
	(mm)	(g)	CONT.	STROBE	CONT.	STROBE
FDX 01...	120	256	0,8	1,6	2,0	4,0
FDX 02...	210	448	1,6	3,2	4,0	8,0
FDX 03...	300	640	2,4	4,8	6,0	12,0
FDX 04...	390	832	3,2	6,4	8,0	16,0
FDX 05...	480	1.024	4,0	8,0	10,0	20,0
FDX 06...	570	1.216	4,8	9,6	12,0	24,0
FDX 07...	660	1.408	5,6	11,2	14,0	28,0
FDX 08...	750	1.600	6,4	12,8	16,0	32,0
FDX 09...	840	1.792	7,2	14,4	18,0	36,0
FDX 10...	930	1.984	8,0	16,0	20,0	40,0
FDX 11...	1.020	2.176	8,8	17,6	22,0	44,0
FDX 12...	1.110	2.368	9,6	19,2	24,0	48,0
FDX 13...	1.200	2.560	10,4	20,7	26,0	52,0
FDX 14...	1.290	2.752	11,2	22,3	28,0	56,0
FDX 15...	1.380	2.944	12,0	23,9	30,0	60,0

(2) The radiated power (W) is before diffuser.