


Linear · GV Series Red 620nm

lumher

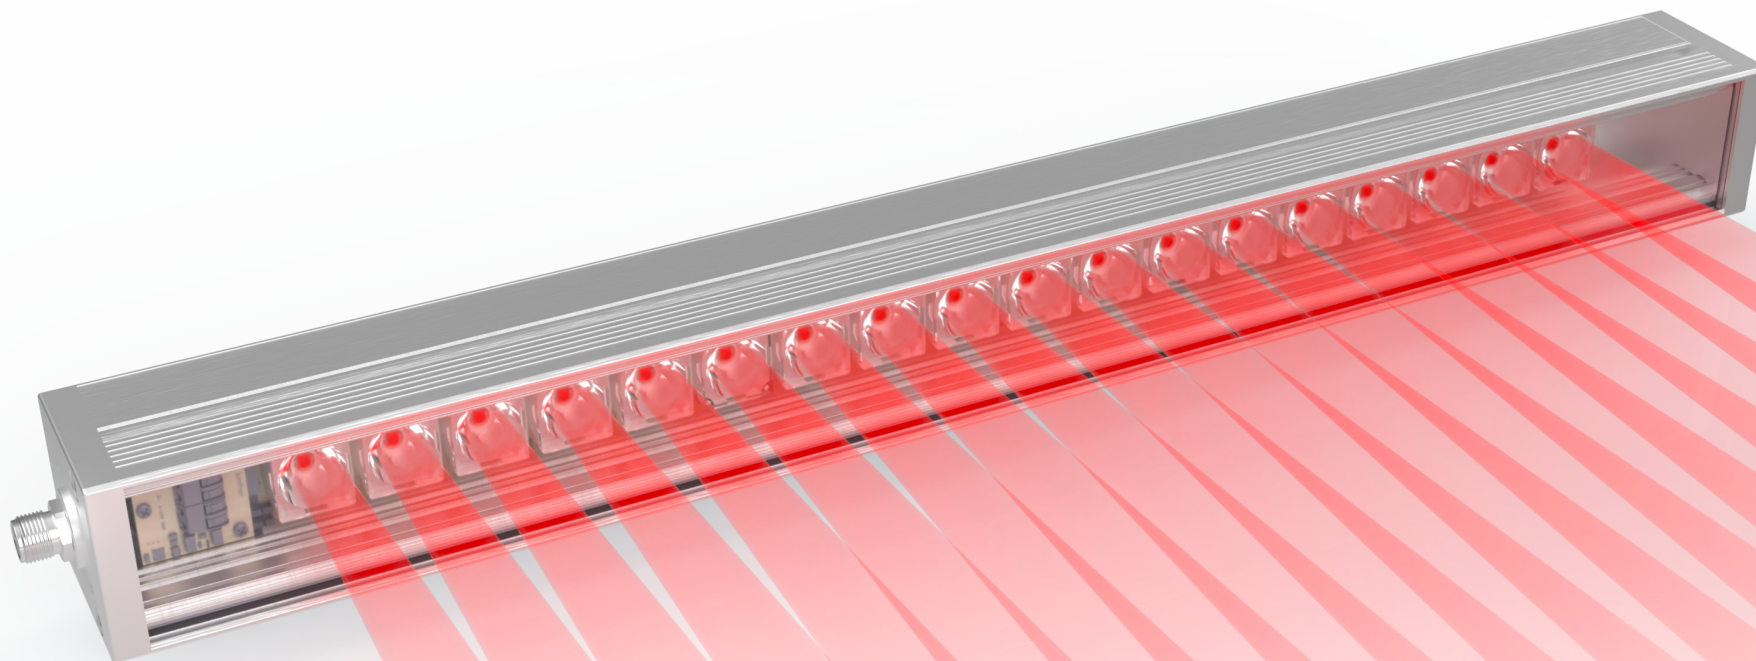

24 V
DC

CONTINUOUS
STROBE
DIMMABLE

150 mm
INCREMENTAL

M12A
M12T
M12T+M12A

OPTICS

CONTINUOUS 1x
STROBE 2x

INTEGRATED
CONTROLLER

IP65

36
MONTHS

EU
MADE IN SPAIN

Technical specifications

Power supply voltage	24 Vdc ±5%	
Trigger input	24 Vdc PNP / NPN	
Max. on time	Continuous = unlimited	Strobe = 250 ms
Max. working cycle	Continuous = 1	Strobe = 1/3
Max. consumption Trigger input	1,5 mA	
Max. number of cascadable modules	This luminaire is not cascadable	
Wavelength	Red	620nm
Beam angle	Transparent Semidiffuse	6° · 15° · 30° 72°
Electrical protections	Transient overvoltages Polarity reversal Current sablizer	YES YES YES
IP Rating	IP65	
Protection type	Class III	
Operating temperature	-10 °C to +40 °C	
Storage temperature	0°C to +60 °C	
Max. relative humidity	80% (without condensation)	
Body material	Anodized aluminum	
Side cover material	Anodized aluminum	
Diffuser material	Polycarbonate / Methacrylate	
Lenses material	Methacrylate	
Connection types	M12A, M12T, cable M12T with connector + M12A	
Standards	RoHs, CE	

Connection

Input	Continuous	Continuous - Strobe
Pin 1	+24 Vdc	+24 Vdc
Pin 2	Trigger NPN	Trigger NPN
Pin 3	0 Vdc	0 Vdc
Pin 4	Trigger PNP	Trigger PNP

Input	Continuous - Strobe - Dimmable	
	M12T Input	M12A Input
Pin 1	+24 Vdc	A+
Pin 2	Trigger NPN	B-
Pin 3	0 Vdc	I-10V
Pin 4	Trigger PNP	GND

M12T Male



M12A Male



Fixings


G00R1

GV · 620nm


lumher

Measures

IP65

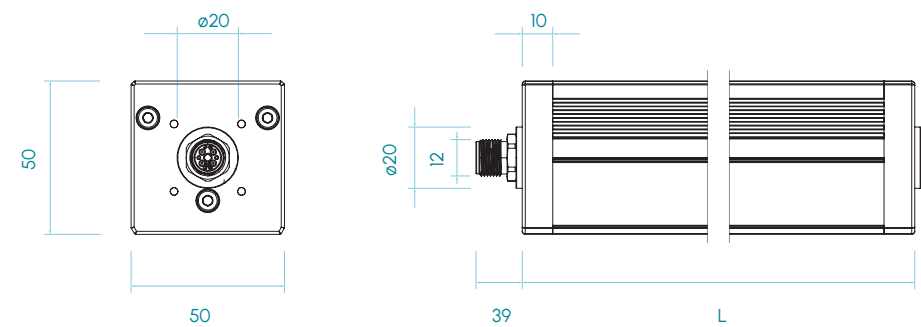


Selection guide

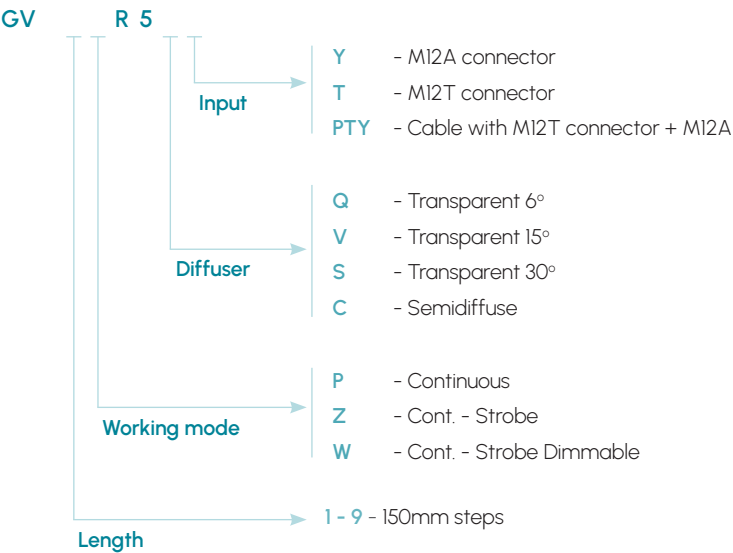

Measures in mm

GV · 620nm

Model GV · Red 620nm

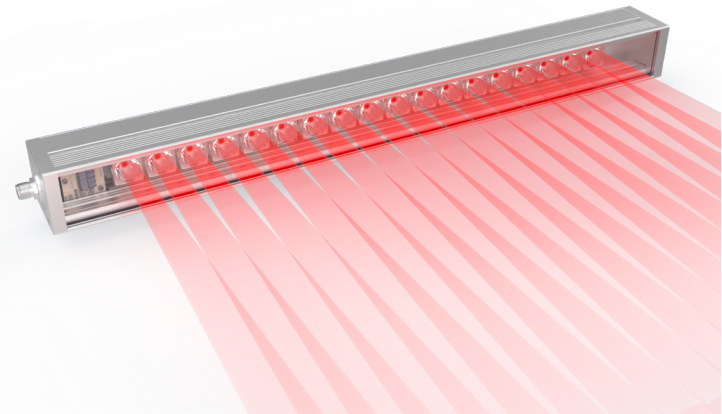

620nm
RED

TRANSPARENT
6°, 15°, 30°

SEMIDIFFUSE

PHOTOBIOLOGICAL
RISK
RG1 - LOW

60.000h
LIFESPAN

Table of characteristics

	Length	Weight	Luminous flux ⁽²⁾		Power consumed	
	L (mm)	(g)	(lm)		(W)	
			CONT.	STROBE	CONT.	STROBE
GV 01 ...	250	741	661	1.157	11,8	26,9
GV 02 ...	400	1.063	1.322	2.313	23,6	53,8
GV 03 ...	550	1.411	1.982	3.470	35,4	80,7
GV 04 ...	700	1.760	2.643	4.627	47,2	107,6
GV 05 ...	850	2.109	3.304	5.784	59	134,5
GV 06 ...	1.000	2.457	3.965	6.940	70,8	161,4
GV 07 ...	1.150	2.806	4.626	8.097	82,6	188,3
GV 08 ...	1.300	3.155	5.286	9.254	94,4	215,2
GV 09 ...	1.450	3.503	5.947	10.410	106,2	242,1

A	M12A
T	M12T

(2) The luminous flux (lm) is before the lenses.