

# Linear · PD Series White 5000K

lumher



24 V  
DC

MASTER  
SLAVE

NOT  
CASCADABLE

90 mm  
INCREMENTAL

CABLE  
M12A

MACHINE VISION

CONTINUOUS 1x  
STROBE 4x

INTEGRATED  
CONTROLLER

POLARIZED

IP40  
IP65

36  
MONTHS

EU  
MADE IN SPAIN


## Technical specifications

|                                   |                                                                  |                   |
|-----------------------------------|------------------------------------------------------------------|-------------------|
| Power supply voltage              | 24 Vdc $\pm$ 5%                                                  |                   |
| Trigger input                     | 24 Vdc PNP / NPN                                                 |                   |
| Max. on time                      | Continuous = unlimited                                           | Strobe = 10 ms    |
| Max. working cycle                | Continuous = 1                                                   | Strobe = 1/6      |
| Max. consumption Trigger input    | 1,5 mA                                                           |                   |
| Max. number of cascadable modules | This luminaire is not cascadable                                 |                   |
| Wavelength                        | White                                                            | 5000 K            |
| Beam angle                        | Semidiffuse<br>Ultradiffuse                                      | 60°<br>110°       |
| Electrical protections            | Transient overvoltages<br>Polarity reversal<br>Current sabilizer | YES<br>YES<br>YES |
| IP Rating                         | IP40 o IP65                                                      |                   |
| Protection type                   | Class III                                                        |                   |
| Operating temperature             | -10 °C to +40 °C                                                 |                   |
| Storage temperature               | 0°C to +60 °C                                                    |                   |
| Max. relative humidity            | 80% (without condensation)                                       |                   |
| Body material                     | Anodized aluminum                                                |                   |
| Side cover material               | Anodized aluminum                                                |                   |
| Diffuser material                 | Polycarbonate                                                    |                   |
| Connection types                  | M12A, 2m cable, M12A connector with cable                        |                   |
| Standards                         | RoHs, CE                                                         |                   |

## Connection

| M12A input - Cable | Continuous    | Master Continuous - Strobe | Slave Continuous - Strobe |
|--------------------|---------------|----------------------------|---------------------------|
| Pin 1 - Brown      | +24 Vdc       | +24 Vdc                    | +24 Vdc                   |
| Pin 2 - White      | Not connected | Trigger NPN                | Not connected             |
| Pin 3 - Blue       | 0 Vdc         | 0 Vdc                      | 0 Vdc                     |
| Pin 4 - Black      | Not connected | Trigger PNP                | Signal IN - a             |

### M12A Male

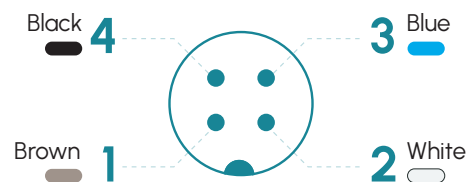

### Fixings

P00G1 , P00G2, P00G3, P00R1, P00R2, P00R3, P00R4, M6D16

PD · 5000K




lumher


Measures

IP40

M12A axial version

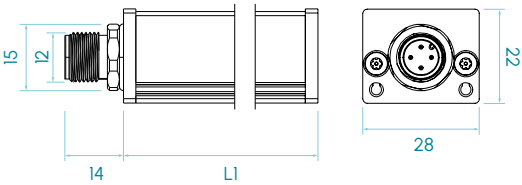


M12A radial version

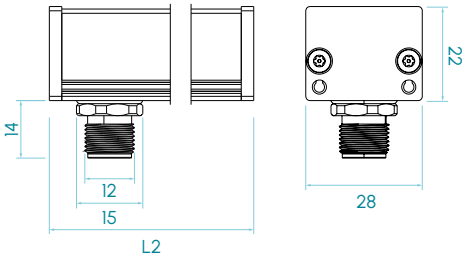


IP65

M12A axial version

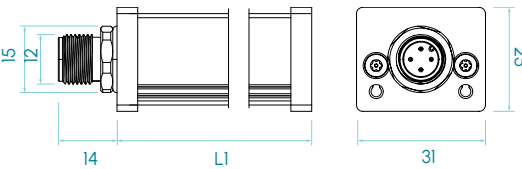


M12A radial version

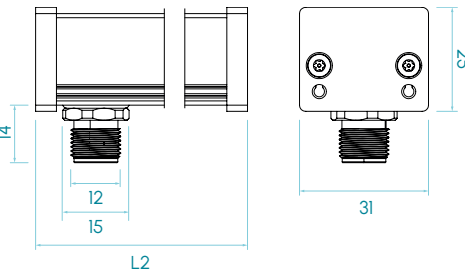

Measures in mm

PD · 5000K

Selection guide

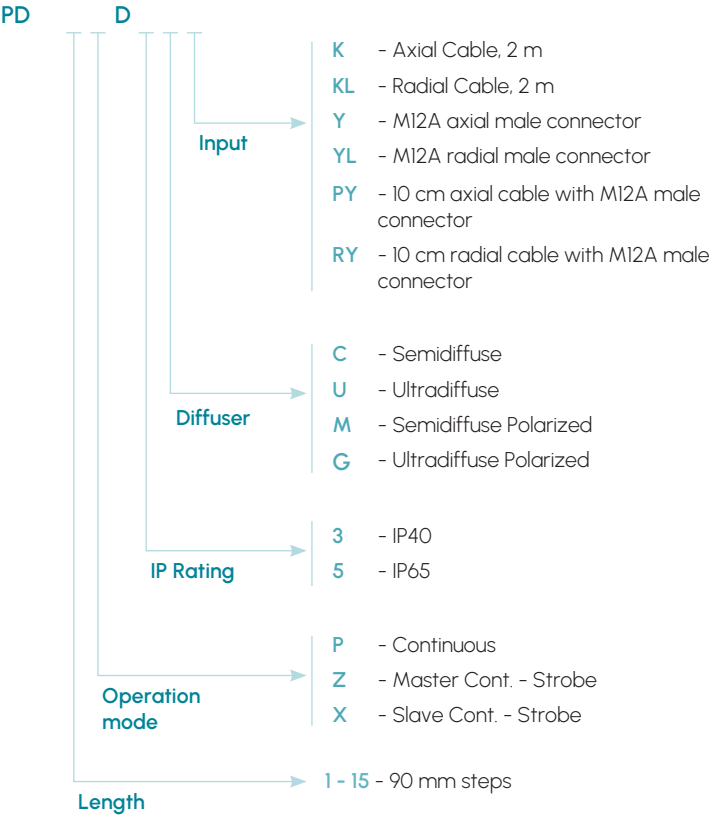

Model PD · White 5000K



5000K

WHITE



SEMIDIFFUSE  
60°



ULTRADIFFUSE  
110°

PHOTOBIOLOGICAL  
RISK

RG1 - LOW

60.000h

LIFESPAN

Table of characteristics

|          | Length            | Length            | Weight | Luminous flux <sup>(2)</sup> |        | Power consumed |        |
|----------|-------------------|-------------------|--------|------------------------------|--------|----------------|--------|
|          | L1 <sup>(1)</sup> | L2 <sup>(1)</sup> |        | (lm)                         |        | (W)            |        |
|          | (mm)              | (mm)              |        | CONT.                        | STROBE | CONT.          | STROBE |
| PD 01... | 120               | 138               | 97     | 304                          | 1.216  | 1,9            | 7,6    |
| PD 02... | 210               | 228               | 145    | 608                          | 2.432  | 3,8            | 15,2   |
| PD 03... | 300               | 318               | 193    | 912                          | 3.648  | 5,7            | 22,8   |
| PD 04... | 390               | 408               | 241    | 1.216                        | 4.864  | 7,6            | 30,4   |
| PD 05... | 480               | 498               | 289    | 1.520                        | 6.080  | 9,5            | 38,0   |
| PD 06... | 570               | 588               | 337    | 1.824                        | 7.296  | 11,4           | 45,6   |
| PD 07... | 660               | 678               | 385    | 2.128                        | 8.512  | 13,3           | 53,2   |
| PD 08... | 750               | 768               | 433    | 2.432                        | 9.728  | 15,2           | 60,8   |
| PD 09... | 840               | 858               | 481    | 2.736                        | 10.944 | 17,1           | 68,4   |
| PD 10... | 930               | 948               | 529    | 3.040                        | 12.160 | 19,0           | 76,0   |
| PD 11... | 1.020             | 1.038             | 577    | 3.344                        | 13.376 | 20,9           | 83,6   |
| PD 12... | 1.110             | 1.128             | 625    | 3.648                        | 14.592 | 22,8           | 91,2   |
| PD 13... | 1.200             | 1.218             | 673    | 3.952                        | -      | 24,7           | -      |
| PD 14... | 1.290             | 1.308             | 721    | 4.256                        | -      | 26,6           | -      |
| PD 15... | 1.380             | 1.398             | 769    | 4.560                        | -      | 28,5           | -      |

(1) Versions with radial input and/or radial output will have as length L2, the rest will be L1.

(2) The luminous flux (lm) is before diffuser.

PD

lumher