


Functional · PR Series White 3000K

lumher



24 V
DC

125
lm/W



CABLE
M12A

POWER 1x
ECO 0,5x

IP40
IP65



36
MONTHS




Technical specifications

Power supply voltage	24 Vdc $\pm$ 5%	
Luminous efficiency	125 lm/W	
PWM regulation (Max 25 KHz)	min. 0%	max. 100%
Wavelength	Warm white	3000K
Beam angle	Semidiffuse Ultradiffuse	60° 110°
Max. number of cascable modules	This luminaire is not cascable	
Electrical protections	Transient overvoltages Polarity reversal Current sabilizer	YES YES YES
Colour Rendering Index (CRI)	≥ 90	
IP Rating	IP40 or IP65	
Protection type	Class III	
Operating temperature	POWER version ECO version	-10°C to +40°C -10°C to +50°C
Storage temperature	0°C a +60°C	
Max. relative humidity	80% (without condensation)	
Body material	Anodized aluminum	
Side cover material	Anodized aluminum	
Diffuser material	Polycarbonate	
Connection types	M12A, 2m cable, M12A connector with cable	
Standards	RoHs, CE	

Connection

Input M12A - Cable	Power	Eco	Dual
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Not connected	24 Vdc = Power 0 Vdc = Eco
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Not connected	Not connected

M12A Male

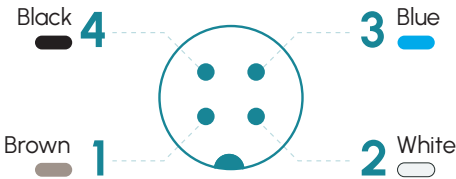

Fixings

P00G1 , P00G2, P00G3, P00R1, M6D16

PR · 3000K




lumher


Measures

IP40

M12A axial version

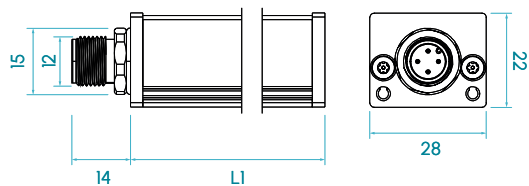


M12A radial version

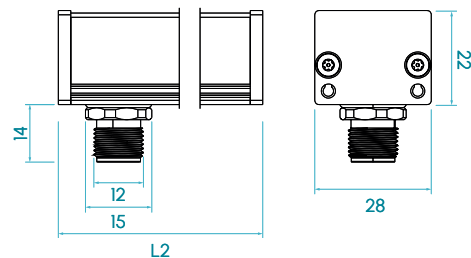


IP65

M12A axial version

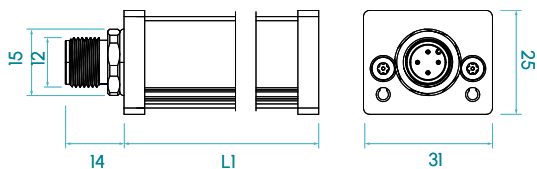


M12A radial version

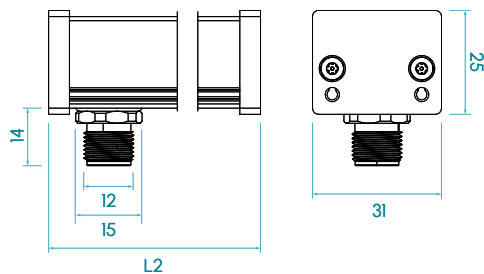

Measures in mm

PR · 3000K

Selection guide

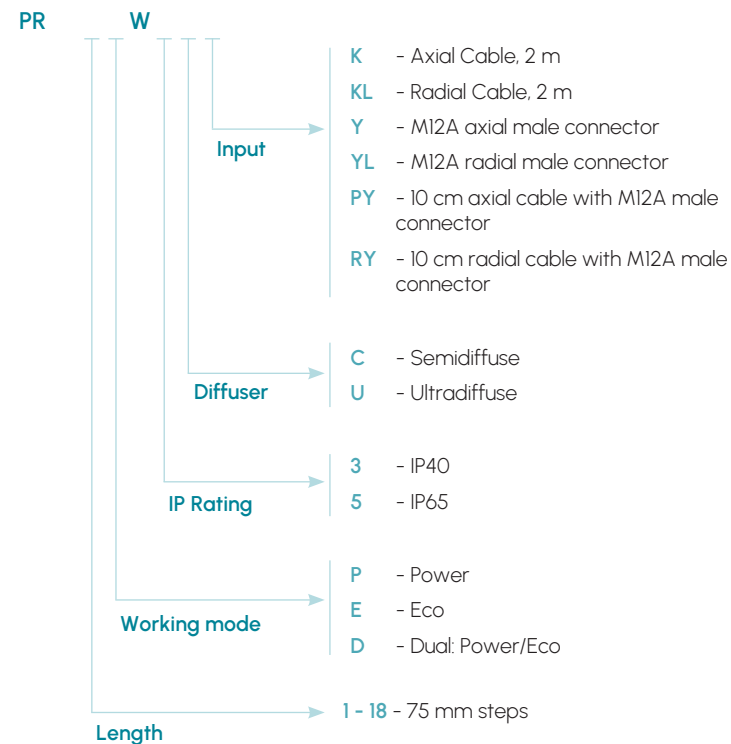

PR Series · Warm white 3000K



PR

3000K
WARM WHITE

SEMIDIFFUSE
60°

ULTRADIFFUSE
110°

PHOTOBIOLOGICAL
RISK
RG1 - LOW

60.000h
LIFESPAN

Table of characteristics

	Length	Length	Weight	Illuminance Ev				Luminous flux ⁽²⁾		Power consumed	
	L1 ⁽¹⁾	L2 ⁽¹⁾	(g)	(lx) @ 1m				(lm)		(W)	
	(mm)	(mm)		SEMIDIFFUSE		ULTRADIFFUSE					
				POWER	ECO	POWER	ECO	POWER	ECO	POWER	ECO
PR 01...	105	123	89	41	21	25	12	195	98	1,6	0,8
PR 02...	180	198	129	82	41	49	25	390	195	3,2	1,6
PR 03...	255	273	169	123	62	74	37	586	293	4,8	2,4
PR 04...	330	348	209	164	82	99	49	781	390	6,4	3,2
PR 05...	405	423	249	205	103	124	61	976	488	8,0	4,0
PR 06...	480	498	289	246	124	148	74	1.171	586	9,6	4,8
PR 07...	555	573	329	287	144	173	86	1.366	683	11,2	5,6
PR 08...	630	648	369	327	165	198	98	1.562	781	12,8	6,4
PR 09...	705	723	409	368	185	222	110	1.757	878	14,4	7,2
PR 10...	780	798	449	409	206	247	123	1.952	976	16,0	8,0
PR 11...	855	873	489	450	226	272	135	2.147	1.074	17,6	8,8
PR 12...	930	948	529	491	247	296	147	2.342	1.171	19,2	9,6
PR 13...	1.005	1.023	569	532	268	321	160	2.538	1.269	20,8	10,4
PR 14...	1.080	1.098	609	573	288	346	172	2.733	1.366	22,4	11,2
PR 15...	1.155	1.173	649	614	309	371	184	2.928	1.464	24,0	12,0
PR 16...	1.230	1.248	689	655	329	395	196	3.123	1.562	25,6	12,8
PR 17...	1.305	1.323	729	696	350	420	209	3.318	1.659	27,2	13,6
PR 18...	1.380	1.398	769	737	371	445	221	3.514	1.757	28,8	14,4

(1) Versions with radial input and/or radial output will have as length L2, the rest will be L1.
(2) The luminous flux (lm) is before diffuser.