


Linear · PDX SERIES Ultraviolet 365 nm

lumher

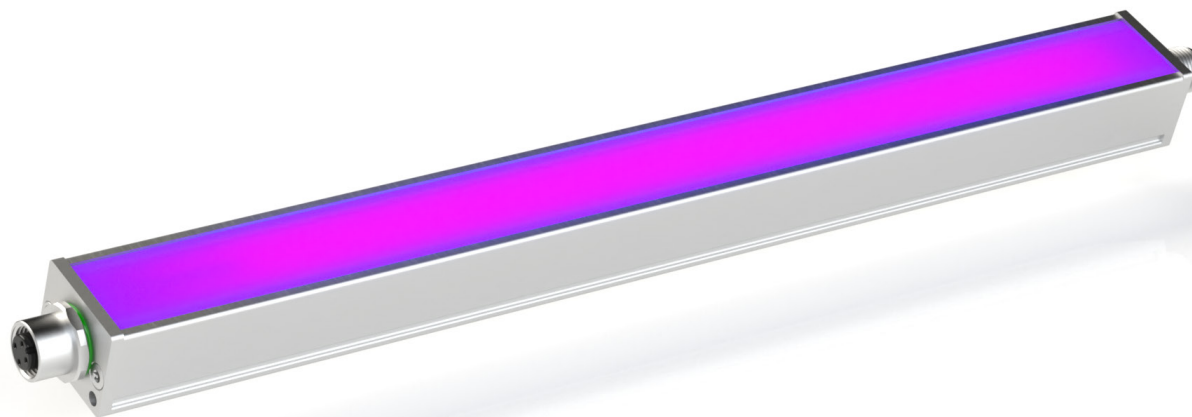

24 V
DC

MASTER
SLAVE



CASCADABLE



INCREMENTAL

CABLE
M12A



MACHINE VISION

CONTINUOUS 1x
STROBE 4x

INTEGRATED
CONTROLLER

IP40
IP65

36
MONTHS

EU
MADE IN SPAIN

Technical specifications

Power supply voltage	24 Vdc $\pm$ 5%	
Trigger input	24 Vdc PNP / NPN	
Max. on time	Continuous = unlimited	Strobe = 10 ms
Max. working cycle	Continuous = 1	Strobe = 1/6
Max. consumption Trigger input	1,5 mA	
Max. number of cascable modules	Power = 48	Strobe = 12
Wavelength	Ultraviolet	365 nm
Beam angle	Transparent	55°
Electrical protections	Transient overvoltages Polarity reversal Current sabilizer	YES YES YES
IP Rating	IP40 o IP65	
Protection type	Class III	
Operating temperature	-10°C to +40°C	
Storage temperature	0°C to +60 °C	
Max. relative humidity	80% (without condensation)	
Body material	Anodized aluminum	
Side cover material	Anodized aluminum	
Diffuser material	Polycarbonate	
Connection types	M12A, 2m cable, M12A connector with cable	
Standards	RoHs, CE	


(1) The number representing the length of the luminaire is the number of modules it has.

Connection


M12A input - Cable	Continuous	Master Continuous - Strobe	Slave Continuous - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Trigger NPN	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Trigger PNP	Signal IN - a

M12A output	Continuous	Master Continuous - Strobe	Slave Continuous - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Not connected	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Signal OUT - a	Signal OUT - a

M12A Male

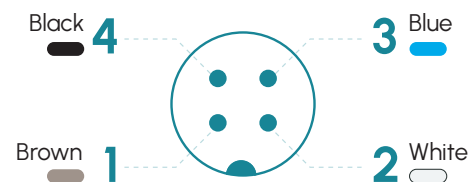

M12A Female

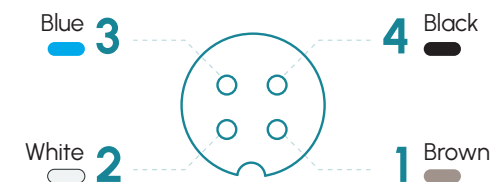

Fixings

P00G1 , P00G2, P00G3, P00R1, P00R2, P00R3, P00R4, M6D16

PDX · 385 nm





lumher


Measures

IP40

M12A axial version


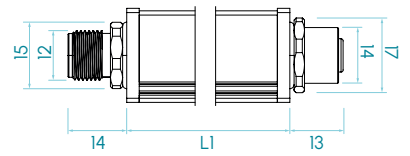


M12A radial version

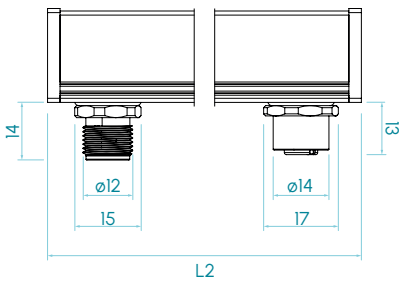


IP65

M12A axial version

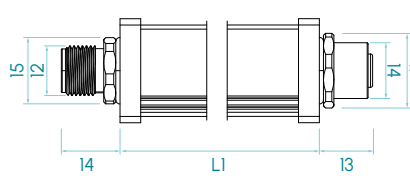


M12A radial version

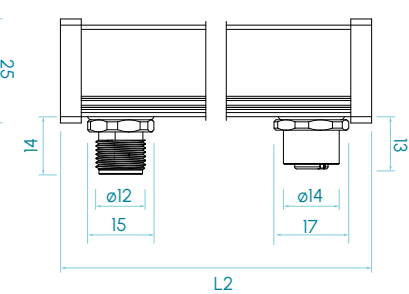

Measures in mm

PDX · 365 nm

Selection guide

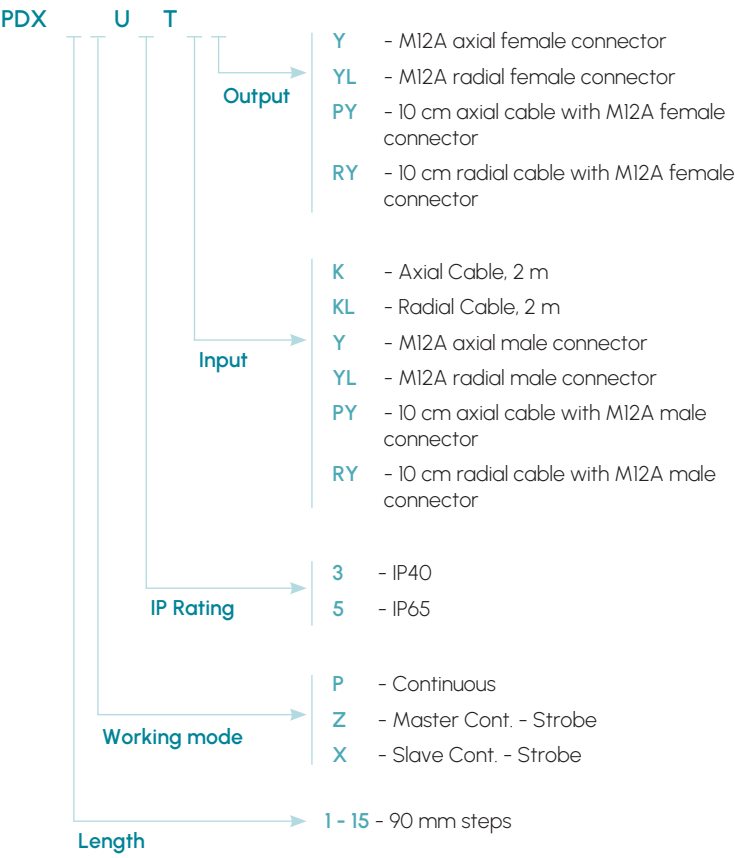

Model PDX · Ultraviolet 365 nm



PDX

365nm
ULTRAVIOLET

TRANSPARENT
55°

PHOTOBIOLOGICAL
RISK
RG2 - MEDIUM

15.000h
LIFESPAN

Table of characteristics

	Length	Length	Weight	Radiated power ⁽³⁾		Power consumed	
	L1 ⁽²⁾	L2 ⁽²⁾		(W)		(W)	
	(mm)	(mm)		CONT.	STROBE	CONT.	STROBE
PDX 01...	120	138	97	0,9	4	1,9	7,6
PDX 02...	210	228	145	1,9	7,5	3,8	15,2
PDX 03...	300	318	193	2,8	11,2	5,7	22,8
PDX 04...	390	408	241	3,7	14,9	7,6	30,4
PDX 05...	480	498	289	4,7	18,7	9,5	38,0
PDX 06...	570	588	337	5,6	22,4	11,4	45,6
PDX 07...	660	678	385	6,5	26,1	13,3	53,2
PDX 08...	750	768	433	7,5	29,9	15,2	60,8
PDX 09...	840	858	481	8,4	33,6	17,1	68,4
PDX 10...	930	948	529	9,3	37,3	19,0	76,0
PDX 11...	1.020	1.038	577	10,3	41,0	20,9	83,6
PDX 12...	1.110	1.128	625	11,2	44,8	22,8	91,2
PDX 13...	1.200	1.218	673	12,1	-	24,7	-
PDX 14...	1.290	1.308	721	13,1	-	26,6	-
PDX 15...	1.380	1.398	769	14,0	-	28,5	-

(2) Versions with radial input and/or radial output will have as length L2, the rest will be L1.
(3) The radiated power (W) is before diffuser.